

<b>Title:</b>	How to add door station to NVR for preview and record	<b>Version:</b>	v1.0	<b>Date:</b>	6/12/2017
<b>Product:</b>	Video Intercom	<b>Page:</b>	1 of 5	<b>HIKVISION</b>	

# How to add door station to NVR for preview and record

## Preparation


1. One door station and one NVR (DS-KD8102-V firmware 1.4.71 and DS-7716NI-E4/16P firmware 3.4.95 in this document);
2. Client software such as iVMS-4200 or Web.

### Note:

1. NVR needs a hard disk for storage.
2. Door station can't be connected to the NVR's PoE port, it can only be connected to the NVR's LAN port.

## Step 1: Add Devices to iVMS-4200


Click **Add to Client** tab to add all devices (one door stations and one NVR) to iVMS-4200, make sure all devices are in the same local network, if not, click **Modify Netinfo** to modify it.

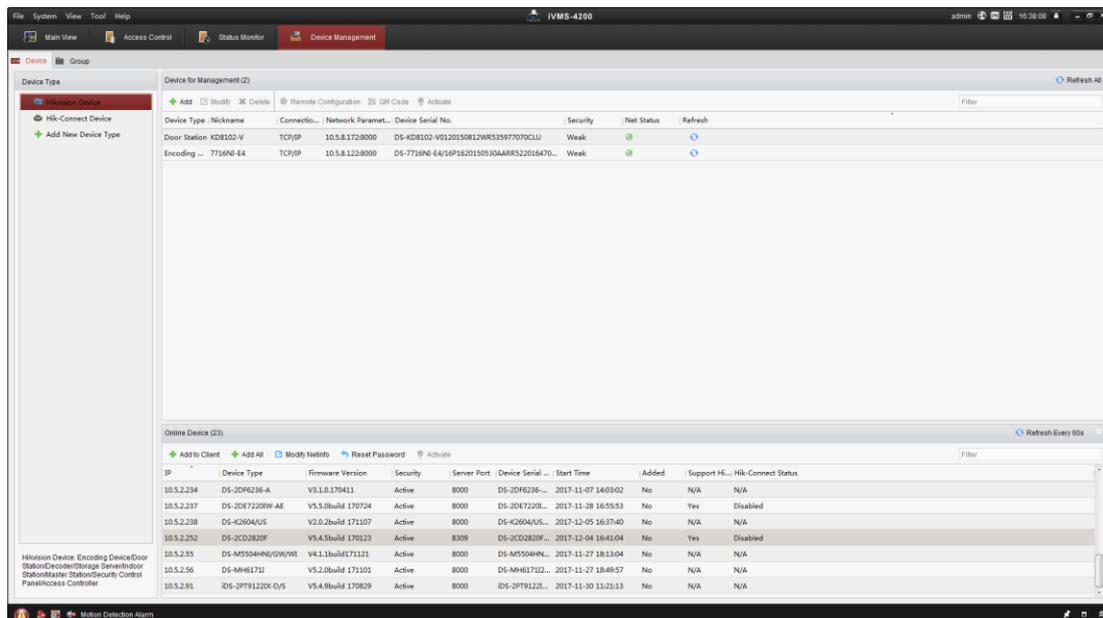


<b>Title:</b>	How to add door station to NVR for preview and record	<b>Version:</b>	v1.0	<b>Date:</b>	6/12/2017
<b>Product:</b>	Video Intercom	<b>Page:</b>	2 of 5	<b>HIKVISION</b>	

## Step 2: Set the NVR

Choose NVR, click **Remote Configuration**, and then go to **System > Camera**, choose one Camera in IP Camera table, then click **Modify**.

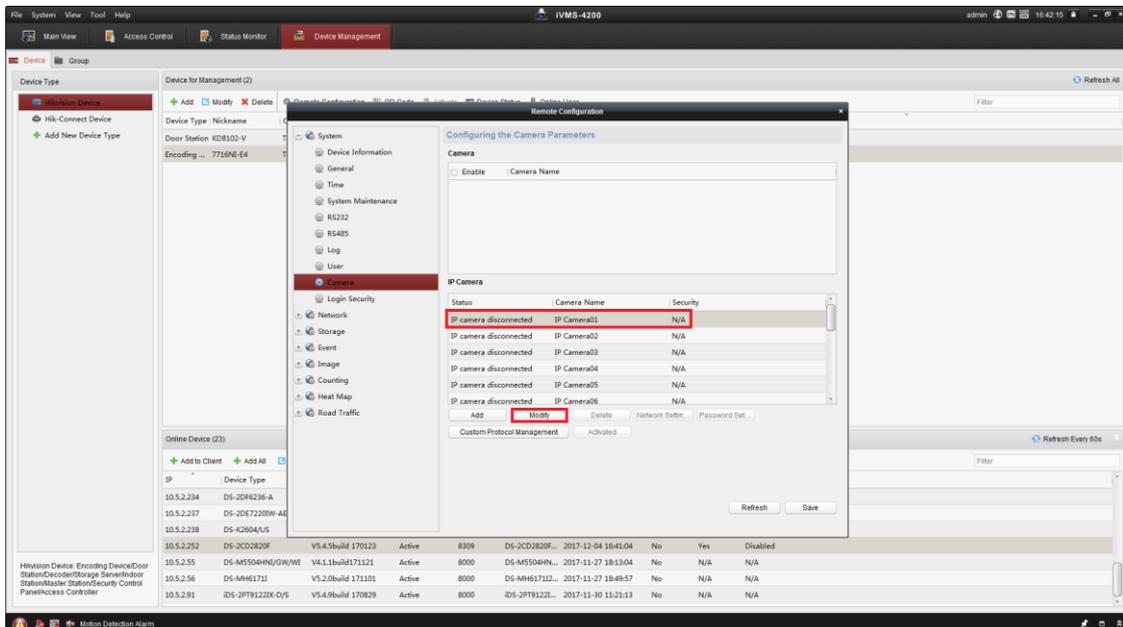

Set Adding method as **Manual**, input IP/Domain, Password, then click **Save**.

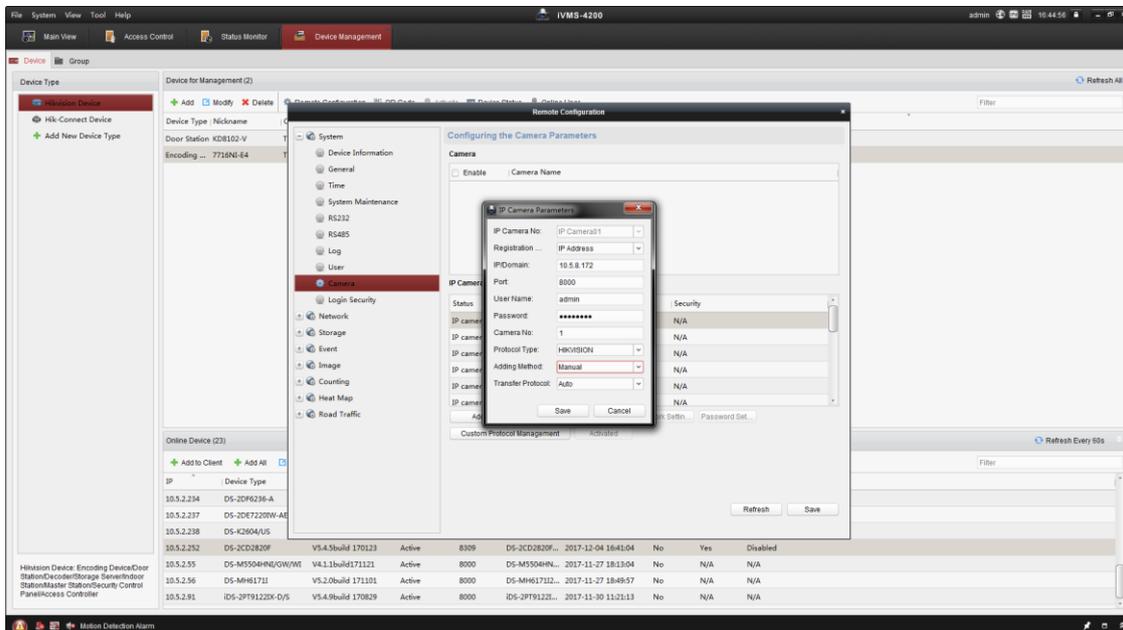

## Step 3: Confirm Live Preview

Click the **Main View**, go to the Camera choose the NVR and the **channel** you set.


<b>Title:</b>	How to add door station to NVR for preview and record	<b>Version:</b>	v1.0	<b>Date:</b>	6/12/2017
<b>Product:</b>	Video Intercom	<b>Page:</b>	3 of 5	<b>HIKVISION</b>	



Make sure the door station could be view normally.


#### Step 4: Set the Storage

Click the **Storage Schedule**, choose the **NVR** and **channel** you set, then click the **Recording Schedule**, choose the **Template**, then click **Save**.

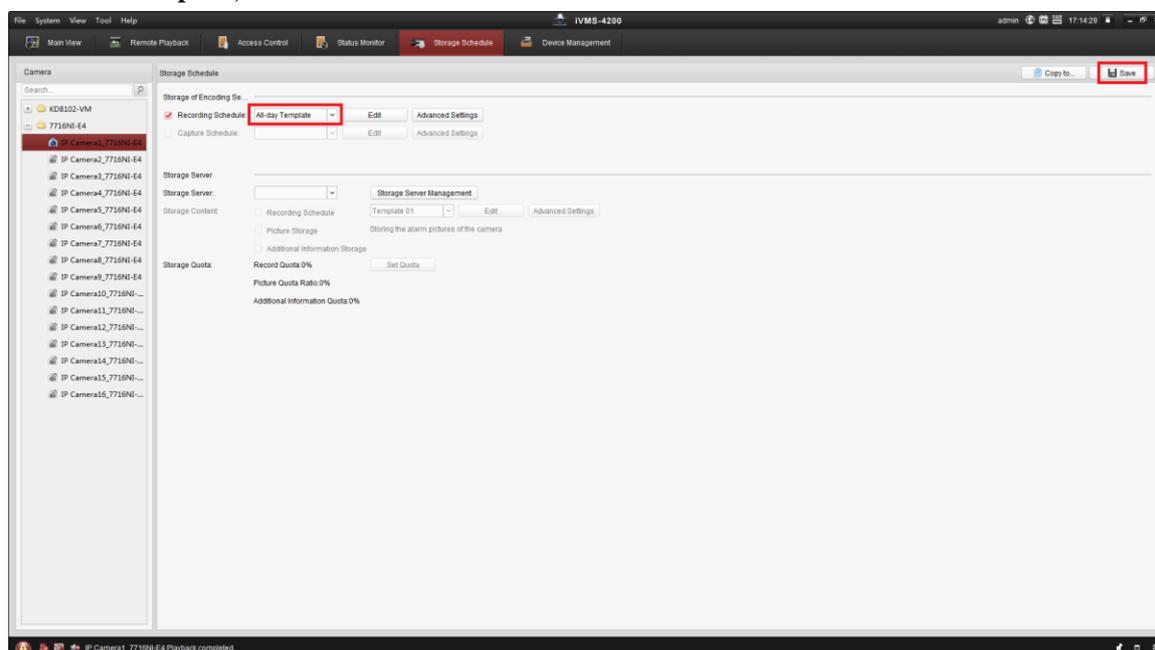

Click the **Remote Playback**, go to the Camera choose the **NVR** and the **channel** you set. Make sure the **Recording Setting** is right.

<b>Title:</b>	How to add door station to NVR for preview and record	<b>Version:</b>	v1.0	<b>Date:</b>	6/12/2017
<b>Product:</b>	Video Intercom	<b>Page:</b>	4 of 5	<b>HIKVISION</b>	

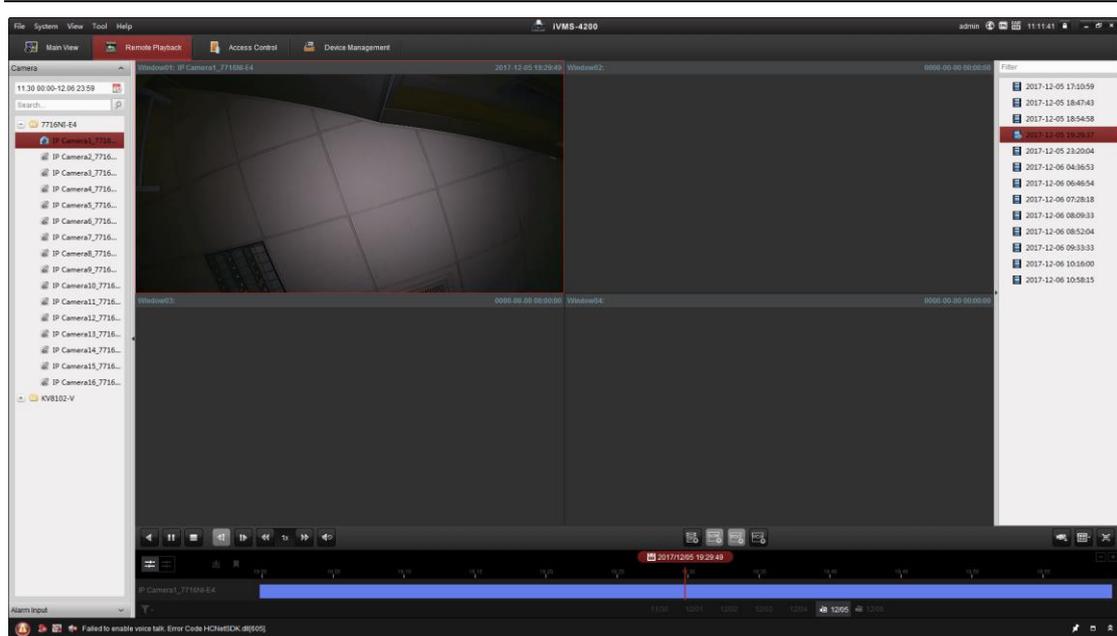

<b>Title:</b>	How to add door station to NVR for preview and record	<b>Version:</b>	v1.0	<b>Date:</b>	6/12/2017
<b>Product:</b>	Video Intercom	<b>Page:</b>	5 of 5		
<hr/>					

**First Choice for Security Professionals**

***HIKVISION* Technical Support**